OPEN FIREPLACES FROM BRUNNER



Urfeuer® 50/66

State: 2018-08-17



BRUNNER®
made in germany.

Dimension sheets - Urfeuer® 50/66

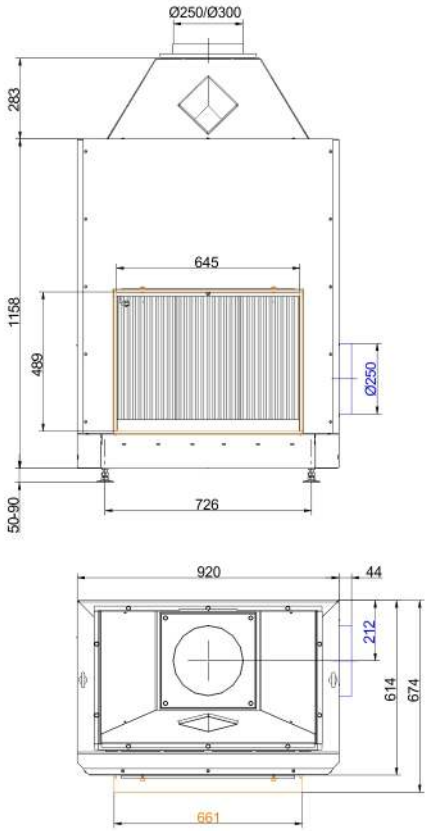

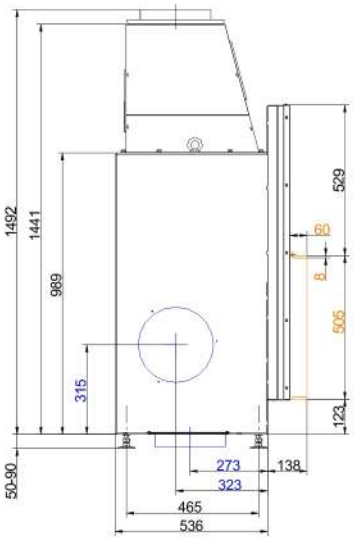

… with mounting frame

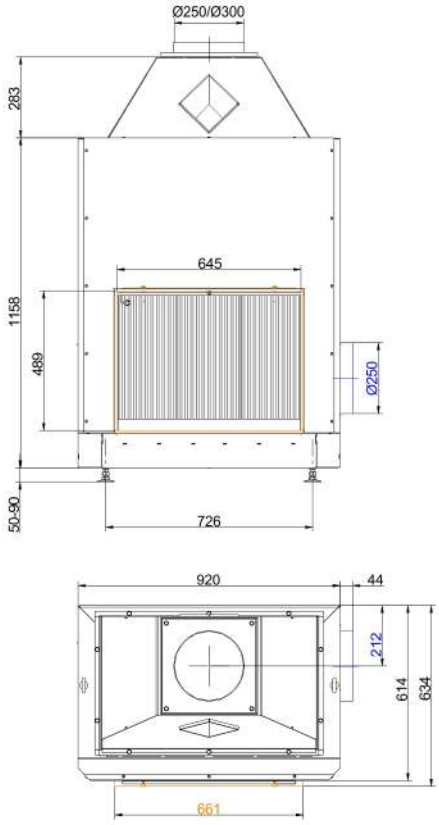

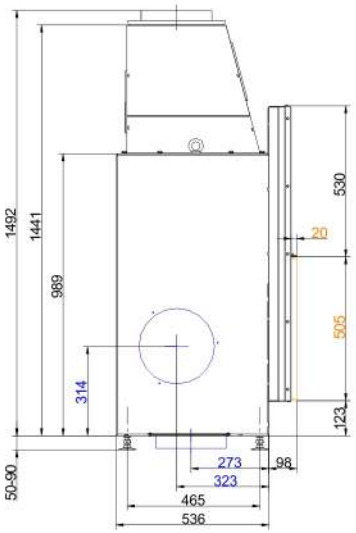

… mounting frame

State: 2018-08-17

Dimension sheets - Urfeuer® 50/66

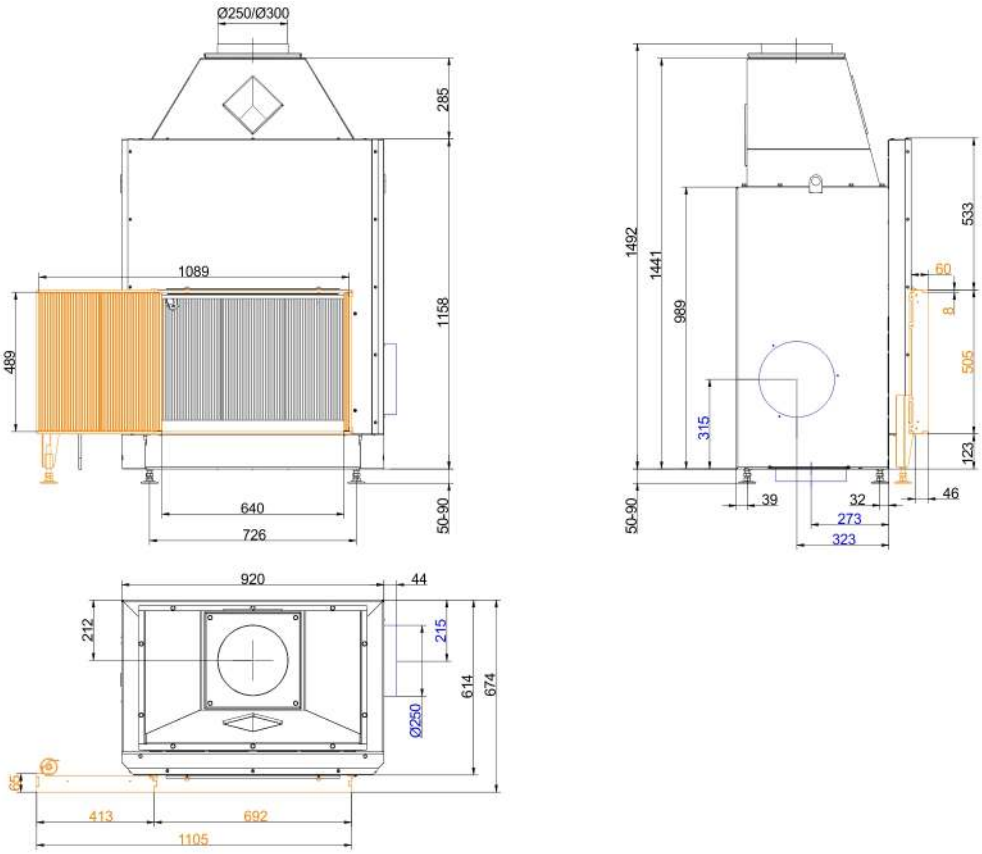

… with mounting frame L2

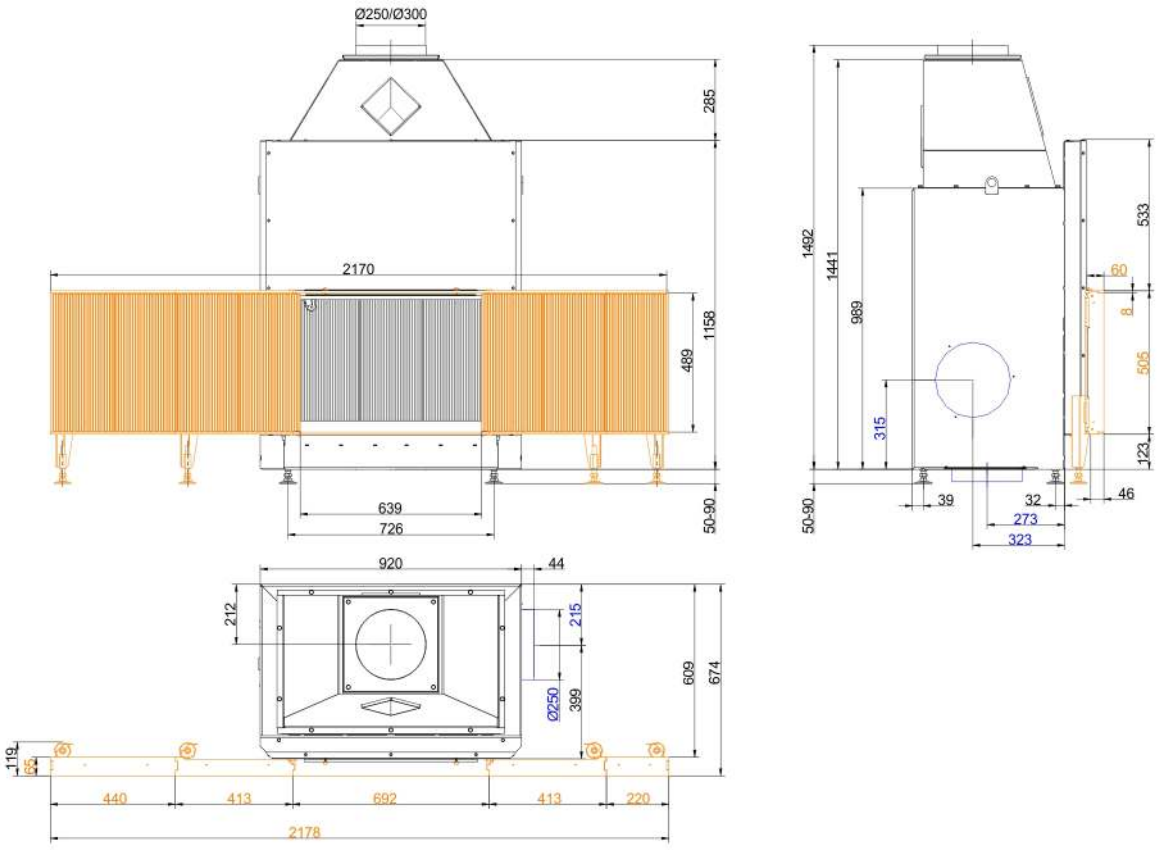

… with mounting frame L4 / R3

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

State: 2018-08-17

Planning and installation - Urfeuer® 50/66

Tested according to		EN 13229 W
EEI		53.5
Data for functional demonstration		
Flue gas mass flow	g/s	115
Outlet temperature	°C	115
Necessary supply pressure	Pa	6
Total fuel load	kg	2 - 4
Combustion air consumption	m^3/h	212
Combustion air connection Ø	mm	250
Cross-section of gratings		
Convection air	cm^2	500
Supply air	cm^2	500
Min. distances of fireplace without / with convection casing		
to insulation layer	cm	6
to mounting floor	cm	2.5
Thermal insulation without / with air gratings		
Mounting wall	cm	10
Ceiling	cm	14
Brick lining for combustible wall	cm	10
Weight		
Fireplace / combustion chamber	kg	213 / 112 / -

Ulrich Brunner GmbH
Zellhuber Ring 17 - 18
D-84307 Eggenfelden
Telefonat: +49 / (0)87 21 / 7 71-0
Telefax: +49 / (0)87 21 / 7 71-100
info@brunner.de | www.brunner.de

BRUNNER®
made in germany.